
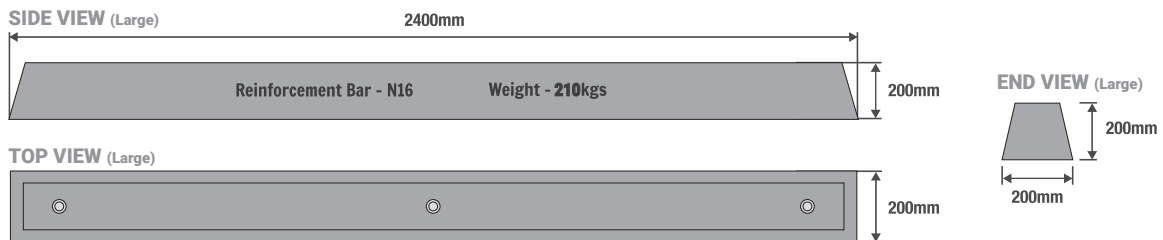


# Parkers WA Concrete Wheel Stops

Permanent heavy duty wheel stop, for installation into bitumen and concrete. Moulded from reinforced concrete, with N12 reinforcement bar.

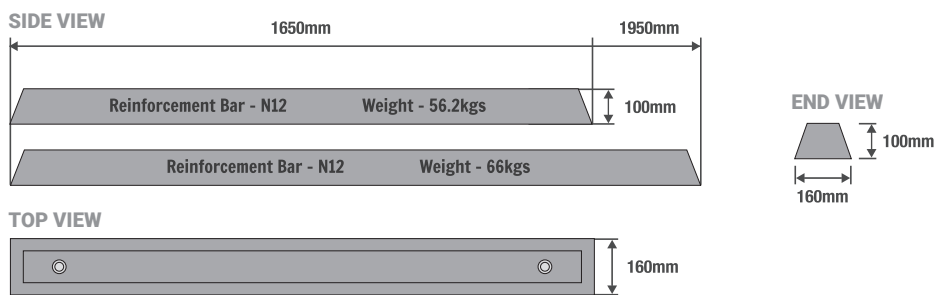

## AUSTRALIAN STANDARDS

- AS 2890.1 - Parking facilities - Off-street car parking

STANDARD FEATURES	SPECIFICATIONS
<ul style="list-style-type: none"> <li>• Manufactured from set concrete with N12 reinforcement bar</li> <li>• Gully centred on underside for drainage and trolley lift</li> <li>• Suitable for installation into bitumen or concrete</li> </ul>	<p><b>Sizes:</b> 1650(L) X 100 (H) X 160 (W) (MM)                      1950 (L) X 100 (H) X 160 (W)                      2400 (L) X 200 (H) X 200 (W)</p> <p><b>Fixing:</b> 2x Ø20 points - 1650 &amp; 1950                      3x Ø20 points - 2400</p> <p><b>Compliance:</b> AS 2890</p> <p><b>Material:</b> 40MPa Reinforced Concrete</p>

PARKING DIRECTION	WHEEL STOP DISTANCE TO FRONT OF PARKING SPACE	
	PARKING TO KERB <150 HIGH	PARKING TO KERB >150 HIGH
	WHEEL STOP HEIGHT	WHEEL STOP HEIGHT
	100	100
<b>FRONT - IN</b>	620	820
<b>REAR - IN</b>	900	1100

